


Ra	0.2	1.6	6.3	25	Q
JIS	▽▽▽▽	▽▽	▽▽	▽	~

GENERAL TOLERANCE	±0.1 0.5~5	±0.2 6~30	±0.3 31~120	±0.5 121~320	±0.8 321~1000
-------------------	---------------	--------------	----------------	-----------------	------------------

HAITIMA CORPORATION
P.O.BOX 34-36 TAIPEI
Tel:+886-2-26585800

E-mail:haitima@seed.net.tw
R.O.C. www.haitima.com.tw
Fax:+886-2-26582266

PART A

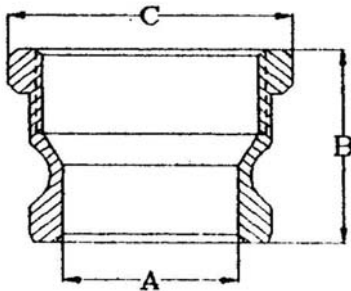

Size		1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"
Size of Thread		1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"
B: Overall Length	NPT	40.9	39	48.5	52.5	54.7	63.5	68	70	74.6	79.2
	BSPT	40.9	39	48.5	52.5	54.7	63.5	83	70	74.6	79.2
A: Min I.D.		14.3	21	23.8	30.8	38.5	46	58	73.2	98.2	150
C: Max Across Corners of Adaptors		28.8	39.2	43.8	51.9	60.4	70.4	82.3	97.8	126.8	187.6

unit:mm



HAITIMA CORPORATION

CHECK BY

DRAWING BY

DATE

SPECIFICATION

Cam & Groove Couplers & Adaptors

Sammy

Apr.21.2014

MATERIAL

SS 316

PROCESS/Nr.

UNIT / SCALE

mm



Revise

Description

Date

Approve

DRAWING NO.

FK-04

-14