


Ra	0.2	▽▽▽▽	JIS
1.6	▽▽		
6.3	▽		
25	▽		
Q	~		

0.5~5 ±0.1 6~30 ±0.2 31~120 ±0.3 121~320 ±0.5 321~1000 ±0.8	GENERAL TOLERANCE
--	----------------------

HAITIMA CORPORATION
P.O.BOX 34-36 TAIPEI
Tel: +886-2-26585800
E-mail: haitima@seed.net.tw
www.haitima.com.tw
TAINAN R.O.C.
Fax: +886-2-26582266

PART C

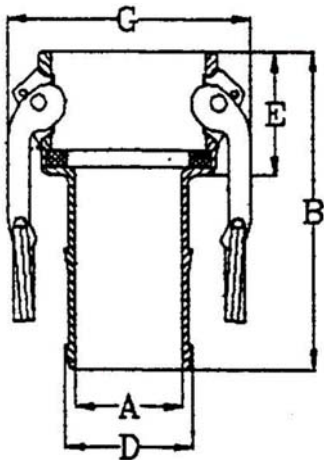

Size	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"
Size of Thread	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"
G: Max O.D.	45.7	53.3	60.9	82.6	90.3	99.8	112.4	137.6	165.6	238.3
B: Overall Length	87	82.8	96.2	102.5	104	120.57	142.3	159.12	163.5	227.87
E: Exposed Length	31.4	32	39	44.5	45	50	54.3	55.5	55.5	65.5
A: Min. I.D.	7.7	13.8	19.8	25.9	32.3	44.5	56.7	68	93.4	144.8
D: Shank O.D.	14.6	21	27	33.7	40.1	52.7	66.3	79	104.4	156.8

unit:mm



HAITIMA CORPORATION

CHECK BY

DRAWING BY

DATE

SPECIFICATION

Cam & Groove Couplers & Adapters

Sammy

Apr.21.2014

MATERIAL

SS 316

PROCESS/Nr.

UNIT / SCALE

mm



Revise

Description

Date

Approve

DRAWING NO.

FK-05

-14