


Ra	0.2	1.6	6.3	25	Q
JIS					

GENERAL TOLERANCE	±0.1	±0.2	±0.3	±0.5	±0.8
	0.5~5	6~30	31~120	121~320	321~1000

HAITIMA CORPORATION
P.O.BOX 34-36 TAIPEI
Tel:+886-2-26585800

E-mail:haitima@seed.net.tw
R.O.C. www.haitima.com.tw
Fax:+886-2-26582266

PART DC

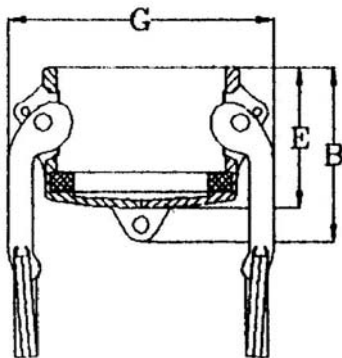

Size	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"
Size of Thread	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"
G: Max O.D.	45.7	53.3	60.9	82.6	90.3	99.8	112.4	137.6	165.6	238.3
B: Overall Length	43.2	46	53	55.2	59.4	65.2	69.8	71.5	72	85.77
E: Exposed Length	33.6	34	41	46.5	47.7	53.2	57.8	59.5	60	70.5

unit:mm



HAITIMA CORPORATION

CHECK BY

DRAWING BY

DATE

SPECIFICATION

Cam & Groove Couplers & Adapters

Sammy

Apr.21.2014

MATERIAL

SS 316

PROCESS/Nr.

UNIT / SCALE

mm



Revise

Description

Date

Approve

DRAWING NO.

FK-07

-14