


Ra	0.2	1.6	6.3	25	Q
JIS	▽▽▽	▽▽	▽	▽	~

GENERAL TOLERANCE	±0.1 0.5~5 6~30	±0.2 31~120	±0.3 121~320	±0.5 321~1000	±0.8
-------------------	-----------------------	----------------	-----------------	------------------	------

HAITIMA CORPORATION
P.O.BOX 34-36 TAIPEI
Tel:+886-2-26585800

E-mail:haitima@seed.net.tw
R.O.C. www.haitima.com.tw
Fax:+886-2-26582266

PART E

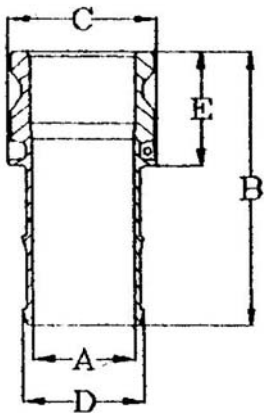

Size	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"
Size of Shank	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"
C: Max O.D.	30.3	35	38	48	55.4	65.3	79.5	93.5	121.5	179
B: Overall Length	86.5	86.3	107.47	109.5	113	129.58	149.5	166.6	174.5	238.5
E: Exposed Length	42	35.5	48.6	51.5	54	59.5	61.5	65	66.5	75
A: Min. I.D.	7.8	13.8	19.8	25.9	32.3	44.5	56.7	68	93.4	144.8
D: Shank O.D.	14.6	21	27	33.7	40.1	52.7	66.3	79	104.4	156.8

unit:mm



HAITIMA CORPORATION

CHECK BY

DRAWING BY

DATE

SPECIFICATION

Cam & Groove Couplers & Adapters

Sammy

Apr.21.2014

MATERIAL

SS 316

PROCESS/Nr.

UNIT / SCALE

mm



Revise

Description

Date

Approve

DRAWING NO.

FK-06

-14